

For dew points of -40° F and -100° F

Features:

- Mounted particulate and oil removal prefilters c/w automatic condensate drains and a one micron afterfilter - no field installation of filters required
- Heavy duty frame with lifting lugs and forklift channels for easy handling
- NEMA 4, 115/1/60 electric - suitable for outdoor operation (all pneumatic units available)
- Units can be field adjusted for -40°F or -100°F pressure dew point
- Full instrumentation package provides ready indication of system malfunction
- High pressure models available


Operating Conditions

- Maximum inlet compressed air temperature: 120°F
- Minimum/maximum ambient temperature: 35/120°F standard (-10/120°F with low ambient package installed)

Transport desiccant dryers on air-ride truck only




Desiccant Dryer Packages

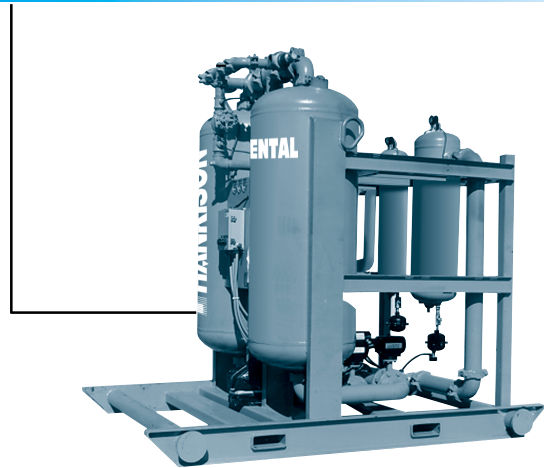

Specifications

Model	Flow (scfm) ⁽¹⁾			Maximum Working Pressure (psig)	In/Out Connections	Dimensions (in)			Weight (lb)
	Inlet	Outlet				H	W	D	
		@ -40°F P.D.P.	@ -100°F P.D.P.						
RDH115	115	98	97	150	1" NPT	90	40	34	650
RDH165	165	141	140	150	1-1/2"NPT	90	40	34	825
RDH260	260	223	220	150	2"NPT	90	42	47	1350
RDH370	370	317	312	150	2" NPT	90	42	60	1650
RDH450	450	385	380	150	2" NPT	92	42	60	1800
RDH590	590	505	498	150	2" NPT	95	50	70	2860
RDH750	750	642	634	150	2-1/2" NPT	97	58	72	3450
RDH930	930	796	786	150	2-1/2" NPT	105	58	72	3800
RDH930G	930	796	786	150	2-1/2" NPT	80	76	73	3500
RDH1130	1130	967	955	150	3" NPT	105	58	72	4300
RDH1350	1350	1156	1141	150	3" NPT	109	58	72	4700
RDH1550	1550	1327	1309	150	3" Boss	100	78	96	5000
RDH1550G	1550	1327	1309	250	3" Boss	79	78	83	5500
RDH2100	2100	1797	1774	150	3" Boss	80	80	73	6900
RDH2100G	2100	1797	1774	150	3" Boss	80	80	73	5750
RDH3000	3000	2567	2534	150	3" Boss	121	86	133	12100
RDH3000G	3000	2567	2534	150	2 x 3 " Boss	81	91	115	9200
RDH4100	4100	3465	3445	150	6" FLG	105	91	115	14000
RDH5400	5400	4620	4561	150	6" FLG	123	96	122	16000
RDH5400G	5400	4620	4561	150	4 x 3" Boss	81	91	153	14800
High Pressure @ 350 psig									
RDHHP495	900	828	818	365	3" NPT	94	78	96	3800
RDHHP715	1300	1196	1186	365	3" NPT	96	78	96	4000
RDHHP1550G	2800	2576	2550	365	3" Boss	79	78	83	6200
RDHHP5200G	9300	8530	8400	365	4 x 3" Boss	81	91	153	19000

(1) Flow shown is based on inlet compressed air at 100 psig and 100°F

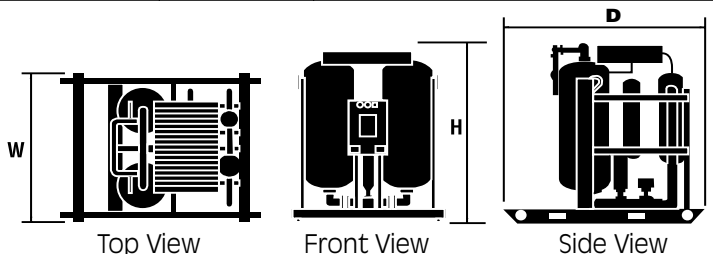

RENTAL DIVISION
 510 N. WILDWOOD DRIVE, IRVING, TX 75061
 Tel: 972-579-2963 Fax: 972-554-6510
 rental@hankisonintl.com